


LA32NP

Material

PPA - Polyphthalamide

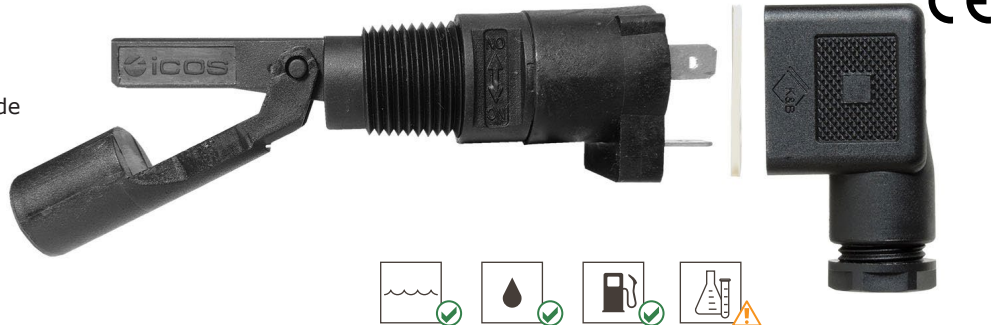

How it works Movement of the magnetic float opens/closes a hermetically sealed contact ([reed switch](#)).

Details

- On/Off SPST output;
- Operation can be normally open or normally closed, by rotating the switch 180°.

Typical applications

- Tank liquid level control;
- Pumps automation.



Chemical products require preliminary tests to confirm compatibility.

Liquid with ferrous particles should be avoided.


Technical specifications

Maximum operating pressure	2bar
Operating temperature range	-10°C to 125°C
Liquid minimum density (SG)	0.70
Sealing	Sealant tape
Output connection	DIN 43650 Connector - B
Enclosure rating	IP66
Electrical contact	Reed Switch 20W/VA

The sensors work in all voltage and current ranges displayed in the table below:

Operating Voltage	Max. Switching Power	Max. Switching Current	Peak Current
110Vac	20VA	0.2A	0.5A @20ms
220Vac	20VA	0.1A	0.5A @20ms
5Vdc	2.5W	0.5A	1A @20ms
12Vdc	5W	0.5A	1A @20ms
24Vdc	10W	0.5A	1A @20ms

24Vac: NOT recommended

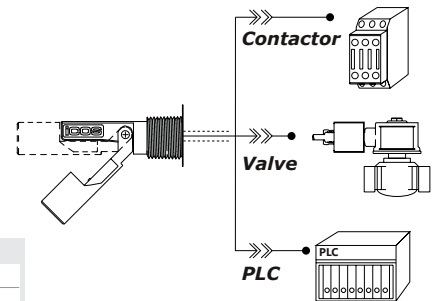


Important!

- For cables longer than 20 meters.
- Relay coupler, timing relay, frequency inverter.

A series **resistor** must be installed.
[Click and check how to install.](#)

Dimensions (mm) and Weight

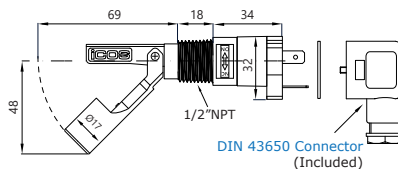


Mounting

NO
Working as
Normally Open

NC
Working as
Normally Closed

180°



70g

Typical connection to contactor

